
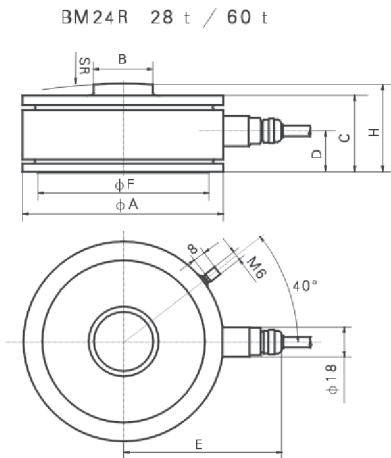
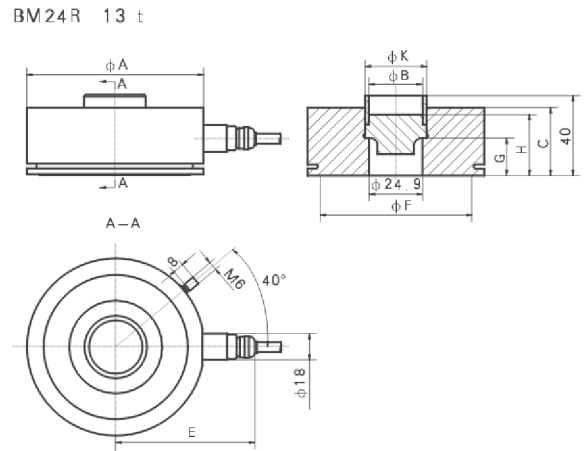



# BM24R

## Outline Dimension mm(inch)

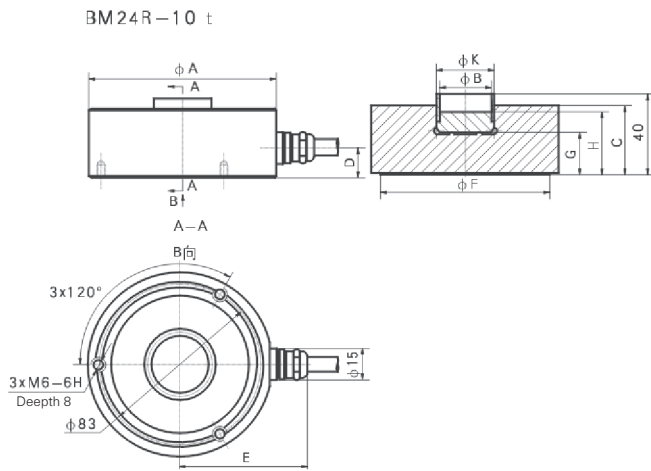

Dimension Capacity	ΦA	ΦB	C	D	E	ΦF	G	H	I	J	ΦK	SR
60kg / 130kg / 280kg	63	15.1	22	11	60	54	6	10	Φ3.2	--	--	--
0.25t/0.5t/1t	80	19	26	12.5	65	71	10	18	M10	1	25	--
2t / 3.5t	80	19	30	12.5	65	71	10	18	Φ15	6	25	--
10t	95	26	35	12.5	72	75	20.7	31.2	--	--	29	--
13t	95	26	35	20	85	79.5	20	31	--	--	29	--
28t	120	35.9	46	25	94	102	--	53	--	--	--	400
60t	140	47.9	62	34	104	124	--	69	--	--	--	600

## Wiring

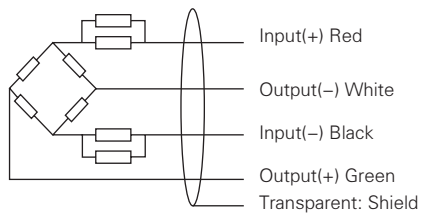

Adopt shielded, 4 conductor cable: Φ6.2 ± 0.1mm

Capacity	Standard cable length ( m )
60Kg	3
130Kg	
250Kg	
280Kg	
500Kg	6
1t	
2t	
3.5t	
5t	15
10t	
13t	
28t	
60t	